

12-06-99

A

Case Docket No. PHA 23,863

THE COMMISSIONER OF PATENTS AND TRADEMARKS, Washington, D.C. 20231

Enclosed for filing is the patent application of Inventor(s):
YASSER ALSAFADI; ANINDA DASGUPTA AND RAYMOND KRASINSKI

For: METHODS FOR INITIATING ACTIVITY IN INTELLIGENT DEVICES
CONNECTED TO AN IN HOME DIGITAL NETWORK USING EXTENSIBLE
MARKUP LANGUAGE (XML) FOR INFORMATION EXCHANGE AND SYSTEMS
THEREFOR

jc617 U.S. PTO
09/454348
12/03/99

ENCLOSED ARE:

- [X] Associate Power of Attorney;
- [X] Information Disclosure Statement, Form PTO-1449 and copies of documents listed therein;
- [] Preliminary Amendment;
- [X] Specification (24 Pages of Specification, Claims, & Abstract);
- [X] Declaration and Power of Attorney:
(2 Pages of a [X]fully executed []unsigned Declaration);
- [X] Drawing (9 sheets of []informal [X]formal sheets);
- [X] Certified copy of application Serial No. ;
- [] Other: ;
- [X] Assignment to PHILIPS ELECTRONICS NORTH AMERICA CORPORATION.

FEE COMPUTATION

CLAIMS AS FILED				
FOR	NUMBER FILED	NUMBER EXTRA	RATE	BASIC FEE - 760.00
Total Claims	23 - 20 =	3	X \$18 =	54.00
Independent Claims	4 - 3 =	1	X \$78 =	78.00
Multiple Dependent Claims, if any			\$260 =	0.00
TOTAL FILING FEE				= \$892.00


Please charge Deposit Account No. 14-1270 in the amount of the total filing fee indicated above, plus any deficiencies. The Commissioner is also hereby authorized to charge any other fees which may be required, except the issue fee, or credit any overpayment to Account No. 14-1270.

[] Amend the specification by inserting before the first line the sentence: --This is a continuation-in-part of application Serial No. , filed .--.

CERTIFICATE OF EXPRESS MAILING

Express Mail Mailing Label No. EL335508544S
Date of Deposit December 3, 1999
I hereby certify that this paper and/or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Josephine Cangelosi
Typed Name Josephine Cangelosi
Signature


Daniel J. Piotrowski, Reg. 42,079
Attorney
(914) 333-9624
U.S. Philips Corporation
580 White Plains Road
Tarrytown, New York 10591
S:\PW\MP01PW10.CNO

12/03/99
jc490 U.S. PTO

12/03/99
jc490 U.S. PTO

**METHODS FOR INITIATING ACTIVITY IN INTELLIGENT DEVICES
CONNECTED TO AN IN HOME DIGITAL NETWORK
USING EXTENSIBLE MARKUP LANGUAGE (XML) FOR INFORMATION
EXCHANGE AND SYSTEMS THEREFOR**

BACKGROUND OF THE INVENTION

The present invention relates generally to data communications between intelligent information and entertainment digital devices (IDDs) forming an in home digital network (IHDN). More particularly, the present invention relates to a novel way to use eXtensible Markup Language (XML) as a mechanism to initiate action in one or more of the IDD's connected to an IHDN to facilitate interoperability and integration thereof.

A myriad of different intelligent digital devices (IDDs) for providing information and entertainment to the user have come into widespread use. These devices include, but are not limited to, conventional (analog) televisions (TVs) and digital TVs (DTV's), such as high definition televisions (HDTV's), Direct Broadcast Satellite (DBS) receivers, cable/terrestrial/satellite set-top boxes (STB's), conventional VCR's, digital video recorders (DVR's), telephones, stereo systems, personal computers (PC's), cellular phones, DVD players, CD-I players, video game consoles, e.g., the recently introduced Sega Dreamcast system, Personal Digital Assistants (PDAs), intelligent Remote Control Devices (RCD's), video cameras, digital cameras, etc. All of the above-mentioned IDD's incorporate one of a Digital Signal Processor (DSP), microcontroller, microprocessor, system-on-a-chip (SOC), Programmable Logic Device (PLD), Programmable Logic Array (PLA), or other digital data processing means.

The rank and file of the computer electronics industry in general and the software industry in particular have been searching for the next "killer" applications, i.e., an application that could drive the sale of hardware just like the Visicalc program drove the sale of the Apple computer. This killer application, as envisioned by many manufacturers, is a single application

with a set of features that a consumer would buy for a premium price. A single new device may not be this killer application. What may be the application that builds customer loyalty and enables widening of profit margins is the ability of a suite of devices to work together to address the needs of the household as no single device can. This inter-operability of devices can increase the value and functionality of the collection of devices in the home and can allow these devices, in concert, to provide services that no single device can adequately provide. Thus, one possible advance akin to a "killer" application is a consumer friendly software set that could be shared by, or distributed among, multiple devices, the ultimate goal being to enable the different intelligent devices to work together in a cooperative and integrated fashion, i.e., as if the entire collection of such devices were a single, distributed, multi-function device. The holy grail of the "home electronics" industry is a mechanism that would allow diverse IDD's to exchange data and act on the exchanged data in a seamless and transparent manner. Thus, two elements needed to implement this "killer" application are a network to connect the IDD's and software permitting the IDD's to act on shared information.

With respect to the first requirement, one way to enable this interconnectivity of consumer devices is to have a communications backbone present in the home. It will be appreciated that this backbone, or network, would allow any capable consumer device to communicate with any other device attached to the network. Many consumers are already beginning to install PC networks in their homes to share, for example, a cable modem or digital subscribed line (DSL) fast internet connection. Moreover, in home digital networks (IHDN's) have been proposed to interconnect a multiplicity of IDD's. The devices connected to such an IHDN can communicate with another over any suitable communications medium, e.g., via an IEEE 1394 serial communications bus, also known as "Fire Wire", or via a wireless communications medium. The IHDN would solve many existing problems of combining devices. Connecting a television, a VCR, a satellite dish, a PC, a stereo and six speakers would no longer require dozens of cables, multiple splitters purchased at an electronics store, and a degree in electrical engineering. All that would be required is connecting each of these devices to the IHDN and turning it on. However, these connected IDD's could still not operate in concert.

What is needed is a method and corresponding system permitting the exchange of information between IDD's. Preferably, what is needed is a method and corresponding system permitting the exchange of information to initiate an operation responsive to receipt of the exchanged information by one of the devices on a network. It would be beneficial if the method and corresponding system could operate on a plurality of the exchanged information. What is also needed is a method to facilitate data exchanges between incompatible intelligent digital devices connected to one another via an IHDN.

SUMMARY OF THE INVENTION

Based on the above and foregoing, it can be appreciated that there presently exists a need in the art for a method and corresponding system which increases the interoperability of intelligent digital devices connect via an in home digital network. The present invention was motivated by a desire to overcome the drawbacks and shortcomings of the presently available technology, and thereby fulfill this need in the art.

In one aspect, the present invention provides a method of operating an intelligent digital device (IDD) receiving an eXtensible Markup Language (XML) document containing data and respective Document Type Definition (DTD) describing the data content. Preferably, the method includes steps for verifying that a received DTD satisfies a predetermined criteria, and operating on the data contained in the XML document. In an exemplary case, the IDD maintains a list of trusted DTDs and the predetermined criteria is equality between the name of the received DTD and the name of a trusted DTD. Alternatively, the predetermined criteria comprises the inclusion of the name of a program residing on the IDD.

In another aspect, the present invention provides a method of operating a system including a digital network interconnected intelligent digital devices (IDDs) generating and receiving eXtensible Markup Language (XML) documents containing data and respective

Document Type Definitions (DTDs) describing the data content. Preferably, the method includes steps for transmitting a generated XML document from a first IDD to a second IDD, and, when the respective DTD for the generated XML document satisfies a predetermined criteria, operating on the data contained in the XML document at the second IDD. In a first exemplary case, the second IDD maintains a list of trusted DTDs, and the predetermined criteria is equality between the name of the respective DTD and the name of a trusted DTD. Alternatively, the predetermined criteria comprises the inclusion of the name of a program residing on the second IDD. In a second exemplary case, the transmitting step includes transmitting the generated XML document from the first IDD to the second IDD and a third IDD, the operating step includes operating on the data contained in the XML document at the second IDD when the respective DTD for the generated XML document satisfies a first predetermined criteria, and the method further includes the step of operating on the data contained in the XML document at the third IDD when the respective DTD for the generated XML document satisfies a second predetermined criteria.

In yet another aspect, the present invention provides a method of operating a system including a digital network interconnected intelligent digital devices (IDDs) generating and receiving eXtensible Markup Language (XML) documents containing data and respective Document Type Definitions (DTDs) describing the data content. Advantageously, the method includes steps for:

- (a) generating an XML document containing related data and a reference to a respective DTD at a first IDD responsive to a command from a second IDD;
- (b) transmitting the XML document from the first to the second IDD;
- (c) when the respective DTD satisfies a predetermined criteria, parsing the data in the XML document in accordance with the format described in the respective DTD to thereby generate parsed data from the related data; and
- (d) operating on the parsed data.

In a still further aspect, the present invention provides a system including a plurality of intelligent digital devices (IDDs) interconnected to one another, each of the IDD's being capable

of one of generating and receiving an eXtensible Markup Language (XML) document containing data and referencing a document type definition (DTD). The system is further characterized in that:

- a first IDD generates the XML document responsive to a command received over the IHDN;
- a second IDD stores N XML processors associated with N named DTDs;
- a third IDD stores M XML processors associated with M named DTDs;
- the second IDD processes the XML document using one of the N XML processors when the respective DTD corresponds to one of the N named DTDs;
- the third IDD processes the XML document using one of the M XML processors when the respective DTD corresponds to one of the M named DTDs; and
- N and M are both positive integers.

Preferably, in the above-mentioned system, at least one of the N named DTDs and at least one of the M named DTDs are identical to the respective DTD, while the one of the N XML processors corresponding to the respective DTD is different than the one of the M XML processors corresponding to the respective DTD. In an exemplary embodiment, the second IDD stores the N named DTDs, while the third IDD stores the M named DTDs. Alternatively, the second and third IDD's store lists of trusted DTDs including the associated N and M named DTDs, and the first IDD generates the XML document and the respective DTD responsive to the command received over the IHDN. The IDD's advantageously can be interconnected via an in home digital network (IHDN).

BRIEF DESCRIPTION OF THE DRAWINGS

These and various other features and aspects of the present invention will be readily understood with reference to the following detailed description taken in conjunction with the accompanying drawings, in which like or similar numbers are used throughout, and in which:

FIG. 1 is a high level block diagram of an intelligent digital device (IDD) connected to an in

home digital network (IHDN);

FIGS. 2A and 2B are alternative configurations of the LUT 128 illustrated in FIG. 1;

FIG. 3 is a representation of the entertainment and information system of the present invention, particularly illustrating how the invention can be used to exchange information based on electronic program guide (EPG) data;

FIG. 4 illustrates the format of an XML(EPG) document which can be transmitted over the IHDN illustrated in FIGS. 1 and 3;

FIG. 5 illustrates the format of a document type definition (DTD) associated with the XML(EPG) document illustrated in FIG. 4;

FIG. 6 is the output VRML 3D output produced for a sample data set of the EPG data in a particular embodiment of the invention; and

FIG. 7 is a high level flowchart illustrating an exemplary embodiment of the method of operating one of the IDD's upon receipt of the XML(EPG) document;

FIG. 8 shows VRML commands as generated by the parsing of the XML (EPG) document; and

FIG. 9 is a representational diagram of the multilevel process by which EPG data is converted to a 3D EPG display.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Illustrative embodiments and exemplary applications will now be described with reference to the accompanying drawings to disclose the advantageous teachings of the present invention.

While the present invention is described herein with reference to illustrative embodiments for particular applications, it should be understood that the invention is not limited thereto. Those having ordinary skill in the art and access to the teachings provided herein will recognize additional modifications, applications, and embodiments within the scope thereof and additional fields in which the present invention would be of significant utility.

As mentioned above, many manufacturers and device vendors have been searching for the next "killer" application for the modern home. One candidate is an in home digital network (IHDN), which advantageously could be used to interconnect all of the accoutrements of a modern home, e.g., DTV, DVD player, surround sound system, several PCs, etc. This integrated entertainment and information system is envisioned to include components which will exchange data, and preferably act on the exchanged data, in a manner which is completely invisible to the system user(s). However, when such a system is fabricated from current electronic components, the system still has the limitation that not every device connected to the IHDN will understand how to communicate with other devices attached to the IHDN.

In terms of the integrated entertainment and information system, once all of the devices in the home are connected together, either hardwired or by a broadcast connection, a communications standard, or common language, is still required so that all of the devices can be understood by all the other devices, i.e., so the connected devices can exchange information and cooperate. The language must be:

- Flexible enough to support a wide array of devices;
- Extensible, so new classes of devices can be supported;
- Easily Parsed by processor and memory constrained devices; and
- An open standard with broad industry backing.

The present invention solves this problem by employing a method in which XML, a language which possesses all of the qualities required in a communications standard for the IHDN, is used in a new way to solve the problem of device interconnectivity. In other words, the method and corresponding system according to the present invention overcome the above-identified problem by fabricating the system from intelligent digital devices (IDDs). In the inventive system, each of the IDD is capable of generating and/or receiving an eXtensible Markup Language (XML) document. Moreover, IDD is capable of receiving the XML document store at least one XML application for processing the data contained in the XML document in accordance with a document type definition (DTD). These features of each IDD will be discussed in greater detail below. Before

a detailed discussion of the IDD is undertaken, a brief discussion of the XML standard, which is a subset of the SGML standard, will be presented.

SGML, an acronym for Standard Generalized Markup Language, is an international standard (ISO 8879:1986) and is a markup language used extensively in publishing and other domains. Additional material on SGML is included in the document entitled "*A Gentle Introduction to SGML*", Text Encoding Initiative, which can be obtained from the web page <http://www-tei.uic.edu/orgs/tei/sgml/teip3sg/index.html>. Moreover, XML is a markup language based on SGML. In either case, "markup" denotes that the information is annotated (or marked up) with tags. Tags surround a section of information (called content) and define the properties of the content. A more detailed explanation is provided in the article by M. Bryan, entitled "*An Introduction to the Extensible Markup Language(XML)*", which is available from The SGML Centre, at <http://www.personal.u-net.com/~sgml/xmlintro.htm>; and the paper by Jon Bosak entitled "*XML, Java, and the Future of the Web*", which is available from Sun Microsystems at <http://metalab.unc.edu/pub/sun-info/standards/xml/why/xmlapps.htm>. It should be noted that all of the documents mentioned above are incorporated herein by reference.

The XML standard is the result of an effort by the World Wide Web Consortium (W3C) to enable the further expansion of Web technology into new domains of distributed document processing. The first officially released specification for XML from W3C was released on Feb. 10, 1998 and the specifications for required related standards are still being formulated.

XML is used to capture structured data and text. In contrast, Hypertext Markup Language (HTML), the language used to develop Web pages, is capable of capturing multimedia documents. Any inherent relationship between the information captured in an HTML document is lost. For example, text annotated in HTML could have the form `<bold> text </bold>`, indicating that the included text would be displayed in a bold font. In contrast, data annotated in XML would have the form `<program-type> text </program-type>`, indicating that the data between the tags denotes the genre of a movie in an electronic program guide (EPG)). It is important to note that in XML, these

data relationships are preserved and can be used by the receiver of the XML document. It should also be mentioned that there are several related standards for XML that specify how to display and link XML documents; this suite of XML standards, used together, can capture, display and link together highly structured information in an effective way.

5

As mentioned immediately above, an important feature of XML is that it separates the data from how that data should be displayed. This is useful because it allows the same XML document to be used by multiple IDD's for different purposes. Since each IDD advantageously can display the data in an appropriate manner, the XML document is flexible and reusable.

10

It should be mentioned that the manner in which each IDD employs the XML documents it receives is determined by the Document Type Definition (DTD). The DTD defines the structure of the XML document including what each tag represents. It should also be mentioned that each IDD advantageously can have its own set of DTD(s) that is (are) applied to the XML documents that the IDD receives. Moreover, as mentioned below, the referenced DTD in an XML document advantageously can be employed to initiate operation of a specific program residing on a respective IDD on the received XML document. See Fig. 7. It will be appreciated that several IDD's can have different versions of, for example, a VRML interpreter, each version generating a VRML world, as discussed in greater detail below with respect to Fig. 6, sized to a different display device. In this way, each IDD can use the same XML document and associated DTD to produce, for example, an IDD-specific presentation. Moreover, as discussed in greater detail below, substantially identical versions of a XML document advantageously can be formatted for display and presentation, in an exemplary case, by merely editing the DTD name included in the XML document to thereby instantiate a different XML application.

25

The ability of the IDD's to generate, transmit, receive, and process XML documents in accordance with respective DTD's are features essential to creating a flexible and scalable IHDN. The entertainment and information system according to the present invention thus consists of a plurality of IDD's connected through a network and communicating with one another using XML

documents. As discussed in greater detail below, each IDD contains an XML parser or processor that allows the IDD to read an XML document and a DTD (or set of DTDs) that allows the IDD to understand XML documents received across the network.

5 A high level block diagram of an exemplary IDD 100 is illustrated in FIG. 1 as including processor 110 receiving instructions from a memory 120 via a bus 130. It will be appreciated that the memory 120 advantageously can include a read-only memory (ROM) 122, a random access memory (RAM) 124, and a general purpose memory 126, which could be a hard disk drive, a CD-ROM, etc. It will also be appreciated that the bus 130 can include a number of general and special
10 purpose buses known to one of ordinary skill in the art. The processor 110 preferably is connected to the IHDN 200 via a first input/output (I/O) device 140 and is connected to another device, e.g., a display 160, via a second I/O device 150.

Preferably, the memory 120 stores at least one XML application for generating and parsing XML documents. Advantageously, the XML application may also build or facilitate the building of XML documents and associated DTDs. In addition, the memory stores the operating program(s) of the IDD, which program(s) advantageously can include(s) a routine for instantiating the XML application when (a) an XML document has been received by the IDD 100 and (b) a predetermined condition is satisfied.

20 In an exemplary case, the 120 stores a look up table (LUT) 128 employing the names of trusted DTDs at pointers to respective XML applications, where trusted DTDs are DTDs that have tested satisfactory when communicating between IDD 100a and 100b, for example. It will be appreciated that trusted DTDs need not be supplied by the vendor of the specific IDD. It will also
25 be appreciated that the memory 120 need not store the actual trusted DTD; the associated XML program can be instantiated as long as a match occurs between the DTD referenced in the XML document and the name of the trusted DTD stored in LUT 128. Alternatively, the memory 120 advantageously can store the trusted DTDs, which saves bandwidth in the IHDN 200. See FIGS. 2A and 2B.

As previously discussed, the present invention employs XML documents as a data exchange mechanism, allowing various and diverse IDD's 100 to share data between themselves over the IHDN 200. One exemplary embodiment of an entertainment and information system 1 according to the present invention is illustrated in FIGS. 3-9 with respect to conveying Electronic Program Guide (EPG) data between several IDD's over the IHDN 200.

Referring to FIG. 3, it will be appreciated that one way to conceptualize the entertainment and information system 1 is by means of the display-centric model being investigated by one of the High Volume Electronics (HVE) strategy groups working in consumer electronics product planning. In this model, a consumer buys a display IDD 100a, e.g., a flat panel display, an entertainment IDD 100b, e.g., a cable/terrestrial/satellite receiver (a.k.a. set-top-box (STB)) which performs all of the audio/video/data decoding functions, an information IDD 100c, e.g., WebTV or similar technology for obtaining Internet content, a recorder IDD 100d, e.g., a digital video recorder or a RePlay recorder, and a computer IDD 100e, i.e., a personal computer. All of the IDD's 100a-100e are operatively connected to one another via the IHDN 200. It will be appreciated that the information IDD 100c can be connected to the Internet (400) via a plain old telephone system (POTS) 300, so that data can be gathered from various data sources, e.g., 402A-402C.

It should be noted that several of the IDD's, e.g., entertainment IDD 100b and information IDD 100c advantageously can be combined in a single IDD 100x, although these IDD's are shown separately in FIG. 3. It should also be noted that the notation IDD is employed throughout to denote the wide scope of the present invention. For example, a nourishment IDD 100f, e.g., a microwave oven, and a speaker system IDD 100g advantageously can be connected to and form part of the entertainment and information system 1 according to the present invention without departing from the spirit and scope of the invention. Moreover, it will be appreciated that the interconnection of multiple IDD's 100 via the IHDN 200 represents only a single preferred embodiment according to the present invention. The IDD's 100 advantageously can be interconnected via the internet, a wireless network, a local area network, a wide area network or a

virtual private network.

In the exemplary preferred embodiment of the invention illustrated in FIG. 3, the entertainment IDD 100b, e.g., the STB, receives raw Electronic Program Guide (EPG) data sent by the broadcaster or cable operator as part of the Program and System Information Protocol (PSIP) standard. See FIG. 9. The EPG data is saved in a database stored in memory 120b located in the IDD 100b. The processor 110b in the IDD 100b then constructs an XML document model out of the raw data, i.e., the EPG data retrieved from the database in memory 120b, and transmits the XML packaged EPG data (hereinafter XML(EPG) document) to the display IDD 100a. In the exemplary embodiment being discussed, the XML(EPG) document includes a reference to a Virtual Reality Modeling Language (VRML) DTD, as illustrated in FIG. 4; the exemplary VRML.DTD is illustrated in FIG. 5. As previously mentioned, the IDD 100b need not actually generate the VRML.DTD (although the IDD 100b could generate the applicable DTD when required). The XML(EPG) document (and the VRML.DTD) is (are) transmitted to the IDD 100a, where the XML(EPG) document is converted for display on display 160a via the VRML 3D encoder instantiated by processor 110a. A representative screen capture of the VRML output is illustrated in FIG. 6.

Referring now to FIG. 7, the method for operating the entertainment and information system 1 will now be explained in detail. More specifically, FIG. 7 is a high level flowchart of a method for operating the entertainment and information system 1 according to the first preferred embodiment of the present invention. During step S10, XML(EPG) document is received at IDD 100a from IDD 100b via IHDN 200. Then, during step S20, a check is performed to determine whether the XML(EPG) document references a trusted DTD, i.e., the VRML.DTD, which advantageously can be listed in LUT 128 of IDD 100a. It will be appreciated from FIGS. 2A and 2B that it is immaterial to the present discussion whether the trusted DTD referenced in the XML(EPG) document is transmitted via the IHDN 200 or stored in memory 120 of IDD 100a. When the answer is negative, the operating program of the IDD 100a jumps to step S50 and performs a check to determine whether the XML(EPG) document references an EPG.DTD.

If the answer at step S20 is affirmative, the processor 110 instantiates the XML processor stored in memory 120 during step S30 and instantiates the VRML interpreter stored in memory 120 during step S40. The XML processor parses the EPG data in the XML(EPG) document and outputs selected portions of the EPG data to the VRML interpreter, which, in turn, interprets the parsed EPG data and generates VRML data, as illustrated in FIG. 8, representing a three dimensional (3D) VRML "world" projected on the screen of the IDD 100a. See FIG. 6, which, as previously mentioned, is a screen capture of a VRML world depicting selected portions of the EPG data, as discussed in greater detail below.

When the answer is affirmative at step S50, the processor 110 instantiates an XML application during step S60, which parses the EPG data in the XML(EPG) document and outputs selected portions of the EPG data to the screen of the IDD 100a as EPG data in a grid form. When the answer is negative at step S50, the routine loops back to the start (step S10) to await the arrival of the next XML document.

Similarly, the IDD 100c, e.g., the WebTV unit or similar component, advantageously can receive Web content in XML or convert HTML into XML/DOM (Document Object Model). The IDD 100c can transmit the XML(HTML) document to the IDD 100a for display. Likewise, the recorder IDD 100d, e.g., a video recorder, also connected to other devices via the IHDN 200, transmits its table of contents (TOC) in XML format, i.e., transmits an XML(TOC) document to the IDD 100a for conversion to VRML for display. Thus, the IDD 100a, which advantageously includes an XML parser and a VRML decoder (interpreter and 3D pipeline), can interact with any other IDD to display data received in XML format.

It will be appreciated that the present invention is not limited to the exemplary embodiment described above. For example, it will be appreciated that IDD 100a advantageously can display 3D data representing the output of a plurality of data sources, e.g., IDs 100b-100d, so that the user(s) can view and information residing on or obtainable via the entertainment and information system 1.

Moreover, it will be appreciated that since the reference to a trusted DTD can be the trigger which initiates the operation of an XML processor or XML application, receipt of two such XML documents or DTDs advantageously can signal the initiation of a third XML application. In an exemplary case, when the XML(EPG) and XML(TOC) documents are both received by the IDD 100a, an exemplary XML application called SORT can be instantiated to examine the XML(EPG) document corresponding to the displayed VRML world for coincidences and/or discontinuities. In an illustrative case, the SORT XML application could be employed to determine that a particular program was marked as being of interest to the user but has not been designated for recording by recorder IDD 100d. It will be appreciated that an updated TOC for the IDD 100d advantageously could be transmitted from the IDD 100a to the IDD 100d as a second XML(TOC) document.

In order to better understand the IHDN described in this particular embodiment of the invention, a more detailed discussion regarding the movement of Electronic Program Guide (EPG) data from IDD to IDD will be presented. It will be appreciated that EPG applications will be more prevalent both as DTV becomes more prevalent and as the number of channels available to the user continues to grow. It will be appreciated that current two dimensional (2D) method of formatting data for display to the user do not scale up to the eventual 500+ channels predicted for DTV.

The EPG-VRML application discussed above is a three dimensional (3D) representation of the programs available in a graphic format similar to the layout appearing in most U.S. newspapers. The advantage of this representation over the 2D representation is that the 3D representation is scalable, i.e., the 3D display advantageously can accommodate the large numbers of channels that will be available to consumer in the near future. As mentioned above, the application was developed using VRML to display the EPG.

It should be mentioned that the EPG data is a structured data set which is very large. Advantageously, XML is designed to work with structured data and can handle arbitrarily large documents. Moreover, the EPG data is composed of text based information; XML works with text based documents. It will be appreciated that XML documents can reference files containing non-

textual data, i.e., images, sounds, etc.

The XML EPG document must capture all of the information necessary to display both a concise listing of the programming available and a more verbose descriptive listing of the programs available. A Document Type Definition (DTD), as documented in XML literature, describes the data to be included in the XML(EPG) document. This DTD is depicted in FIG. 5. It will be noted that the VRML.DTD indicates the name of the processing application which advantageously can be used to further manipulate the EPG data, as discussed in greater detail below.

It will be noted that the DTD describes how all of the individual data elements associated with each television program are composed and related to each other. The DTD also describes how all of the television programs are grouped together to create an XML(EPG) document that captures all of the available programming on all of the available channels for some predetermined time period. Preferably, the XML(EPG) document must contain specific information about each program available to be useful to a user. The EPG document must, at a minimum contain the name of each available television program, the start time, the end time, and the channel for every television program. Additionally, each television program in the XML(EPG) document has a broad category label, indicating the type of program, i.e., comedy, musical, etc. A description of each television program would also be useful to the user, and as such is included in the XML(EPG) document and the associated DTD. As a possible extension, additional category specific information can also be included with the television program. For example, a movie listed in the EPG data advantageously can indicate the name of the director while a sporting event would indicate the type of sport being played and names of the players or teams playing.

As mentioned above, one partial example of the XML(EPG) document is depicted in FIG. 4. It should be noted from FIG.4 that the name of the channel associated with this television program may not be needed by the EPG. In that case, the channel identification will simply be discarded when the IDD 100a parses the XML(EPG)document and displays the 3D representation of the EPG data to the user.

It will be appreciated that the data representation in XML is highly scalable. Any number of programs on any number of channels can be added to the XML document and transmitted to the EPG application via entertainment IDD 100b, IHDN 200, and display IDD 100a, which would cooperatively take the EPG data, parse it, and display the 3D representation of the EPG data, i.e., the VRML world, for the user. XML can therefore be used as the data transmission facilitator, even as the number of channels and programs increases over time.

Once the XML(EPG) document is received by the XML processor and VRML interpreter instantiated by processor 110a, the document is processed and displayed. For this application, the EPG data within the XML(EPG) document is converted to VRML data by the VRML interpreter and displayed for the user to browse and navigate. The parsing of the EPG data in the XML(EPG) document and the conversion of the parser's output to VRML format is performed by the XML processor and VRML encoder running on processor 110a. It is important to note that, because the EPG data is encoded in XML, a different XML application corresponding to a different method of displaying the EPG data could be substituted for this application (See FIG. 7.) without requiring any changes to the XML(EPG) document or the transmission mechanism, with the possible exception of modifying the DTD name in the XML(EPG) document. In short, an XML application is simply a consumer of the XML(EPG) document and does not need to know anything about the origins of the XML(EPG) document or how this document was delivered to the XML application. The originator of the EPG data in the XML(EPG) document could also be replaced without affecting the display of EPG data in any meaningful way.

It will be appreciated that parsing the XML(EPG) document entails walking through the XML document and collecting up all the relevant information, in an exemplary case, about each of the programs in the XML document. This information must then be translated into a useful VRML representation of the data, which is a relatively straightforward transform understood by one of ordinary skill in the art. A selected portion of the VRML program data is shown in FIG. 6; a selected portion of the VRML commands is depicted in FIG. 8.

The EPG VRML program data is used by the EPG application to display all of the programs in the VRML visual display to the user. This allows the data to change, but keep the same visual VRML representation.

5

A functional diagram depicting the entire process, from receiving EPG data at IDD 100b to displaying the 3D visualization of the EPG data on display IDD 100a application, including an exemplary data transformation, transmission, and display sequence is illustrated in FIG. 9. In FIG. 9, it is assumed the raw EPG data is not saved in XML format and must be converted to XML by
10 IDD 100b. Before the data is converted to XML, it is cleansed of any erroneous or unnecessary data points and saved in memory 120b of IDD 100b. The cleansed data can then be formatted into a structure that makes conversion into XML easier. It will be appreciated that this may involve ordering the data in a consistent way and collecting related data records together. Once this step has been completed, the data is converted to and XML representation, based on the selected DTD for EPG data, by processor 110b.

15

The XML(EPG) document is then transmitted to the display IDD 100a for display. Once received by the IDD 100a, the XML(EPG) document is parsed and converted into the format necessary for display, using the referenced DTD. See FIG. 7. In the exemplary case under discussion, the XML processor parses the XML(EPG) document and generates data suitable for
20 application to the VRML interpreter, which generates the VRML data corresponding to the EPG data. This VRML code is then combined with the VRML code that describes the 3D VRML world structure. Once this step is completed, a VRML world containing a 3D representation of current EPG data is ready for display on IDD 100a.

25

It will be appreciated from FIG. 7 that the VRML world has many features to aid the user in navigating the EPG data in a useful manner. The user can visually highlight categories of programs, programs within specific time periods, or some combination of the two. The user may also select channels of interest and move up and down through the vast selection of available channels. It is

also possible to display a preview of some of the programs on the preview screen above the EPG program listings. It will be noted that the day tower at the nexus of the channel axis and time axis is used to change the day being viewed.

5 It should be noted again that all of the documents, articles and papers cited above are incorporated herein by reference. Moreover, it should again be stressed that while the mechanism by which the various IDD's are interconnected is described as an IHDN with respect to one preferred embodiment, the present invention is not limited to IDD's interconnected in this manner. The IDD's can also be interconnected via the internet, a virtual private network, a wireless
10 network, a local area network, or a private wide area network without departing from the scope of the present invention.

Finally, it should be noted that many of the tools currently available for working with XML can be obtained for free. Many are simple experiments by individuals interested in exploring this new domain, some are beta versions of tools that companies plan on selling at some point in the future, and other tools are released by companies as freeware in the hopes that it will spur the movement of development efforts on the Internet towards XML and other products sold by these companies.

20 Although a presently preferred embodiment of the present invention has been described in detail hereinabove, it should be clearly understood that many variations and/or modifications of the basic inventive concepts herein taught, which may appear to those skilled in the pertinent art, will still fall within the spirit and scope of the present invention, as defined in the appended claims.

WHAT IS CLAIMED IS:

1. A method of operating an intelligent digital device (IDD) receiving an eXtensible Markup Language (XML) document containing data and respective Document Type Definition (DTD) describing the data content, comprising:

verifying that a received DTD satisfies a predetermined criteria; and
operating on the data contained in the XML document.

2. The method as recited in claim 1, wherein the IDD maintains a list of trusted DTDs and wherein the predetermined criteria is equality between the name of the received DTD and the name of a trusted DTD.

3. The method as recited in claim 1, wherein the predetermined criteria comprises the inclusion of the name of a program residing on the IDD.

4. The method as recited in claim 3, wherein the program comprises an XML-enabled program.

5. The method as recited in claim 3, wherein the program comprises an XML parser.

6. A method of operating a system including a digital network interconnected intelligent digital devices (IDDs) generating and receiving eXtensible Markup Language (XML) documents containing data and respective Document Type Definitions (DTDs) describing the data content, comprising:

transmitting a generated XML document from a first IDD to a second IDD; and
when the respective DTD for the generated XML document satisfies a predetermined criteria, operating on the data contained in the XML document at the second IDD.

7. The method as recited in claim 6, wherein the second IDD maintains a list of trusted

DTDs and wherein the predetermined criteria is equality between the name of the respective DTD and the name of a trusted DTD.

8. The method as recited in claim 6, wherein the predetermined criteria comprises the inclusion of the name of a program residing on the second IDD.

9. The method as recited in claim 8, wherein the program comprises an XML-enabled program.

10. The method as recited in claim 8, wherein the program comprises an XML processor.

11. The method as recited in claim 6, wherein:

the transmitting step comprises transmitting the generated XML document from the first IDD to the second IDD and a third IDD;

the operating step comprises operating on the data contained in the XML document at the second IDD when the respective DTD for the generated XML document satisfies a first predetermined criteria, and

the method further comprises the step of operating on the data contained in the XML document at the third IDD when the respective DTD for the generated XML document satisfies a second predetermined criteria.

12. The method as recited in claim 11, wherein:

the second IDD maintains a first list of trusted DTDs;

the third IDD maintains a second list of trusted DTDs;

the first predetermined criteria is equality between the name of the respective DTD and the name of a trusted DTD on the first list; and

the second predetermined criteria is equality between the name of the respective DTD and the name of a trusted DTD on the second list.

13. The method as recited in claim 11, wherein the XML document and the respective DTD are transmitted to the second and third IDD.

14. The method as recited in claim 11, wherein the respective DTD is stored on at least one of the second and third IDDs.

15. A method of operating a system including a digital network interconnected intelligent digital devices (IDDs) generating and receiving eXtensible Markup Language (XML) documents containing data and respective Document Type Definitions (DTDs) describing the data content, comprising:

(a) generating an XML document containing related data and a reference to a respective DTD at a first IDD responsive to a command from a second IDD;

(b) transmitting the XML document from the first to the second IDD;

(c) when the respective DTD satisfies a predetermined criteria, parsing the data in the XML document in accordance with the format described in the respective DTD to thereby generate parsed data from the related data; and

(d) operating on the parsed data.

16. The method as recited in claim 15, wherein:

the second IDD stores a list of trusted DTDs associated with respective XML processors;

the predetermined criteria is coincidence between the respective DTD and a trusted DTD on the list; and

the parsing and the operating steps are performed using the one of the XML processors corresponding to the respective DTD.

17. The method as recited in claim 16, wherein:

the second IDD stores a plurality of DTDs and associated XML processors;

the XML document references the respective DTD; and

the parsing and the operating steps are performed using the one of the XML processors

corresponding to the respective DTD.

18. A system comprising:

a plurality of intelligent digital devices (IDDs) interconnected to one another, each of the
5 IDDs being capable of one of generating and receiving an eXtensible Markup Language (XML)
document containing data and referencing a document type definition (DTD); wherein:

a first IDD generates the XML document responsive to a command received over the
IHDN;

a second IDD stores N XML processors associated with N named DTDs;

10 a third IDD stores M XML processors associated with M named DTDs;

the second IDD processes the XML document using one of the N XML processors when
the respective DTD corresponds to one of the N named DTDs;

the third IDD processes the XML document using one of the M XML processors when
the respective DTD corresponds to one of the M named DTDs; and

N and M are both positive integers.

19. The system as recited in claim 18, wherein at least one of the N named DTDs and at
least one of the M named DTDs are identical to the respective DTD, and wherein the one of the
N XML processors corresponding to the respective DTD is different than the one of the M XML
processors corresponding to the respective DTD.

20. The system as recited in claim 18, wherein the second IDD stores the N named
DTDs, and wherein the third IDD stores the M named DTDs.

25 21. The system as recited in claim 18, wherein the second and third IDDs store lists of
trusted DTDs including the associated N and M named DTDs, and wherein the first IDD
generates the XML document and the respective DTD responsive to the command received over
the IHDN.

22. The system as recited in claim 18, wherein said IDD's are interconnected to one another by an in home digital network (IHDN).

23. The system as recited in claim 18, wherein said IDD's are interconnected to one another via the internet.

5

ABSTRACT OF THE DISCLOSURE

A method of operating a system including a digital network interconnected intelligent digital devices (IDDs) generating and receiving eXtensible Markup Language (XML) documents containing data and respective Document Type Definitions (DTDs) describing the data content. Preferably, the method includes steps for transmitting a generated XML document from a first IDD to a second IDD, and, when the respective DTD for the generated XML document satisfies a predetermined criteria, operating on the data contained in the XML document at the second IDD. In a first exemplary case, the second IDD maintains a list of trusted DTDs, and the predetermined criteria is equality between the name of the respective DTD and the name of a trusted DTD. Alternatively, the predetermined criteria is satisfied by inclusion of the name of a program residing on the second IDD in the respective DTD. In a second exemplary case, the transmitting step includes transmitting the generated XML document from the first IDD to the second IDD and a third IDD, the operating step includes operating on the data contained in the XML document at the second IDD when the respective DTD for the generated XML document satisfies a first predetermined criteria, and the method further includes the step of operating on the data contained in the XML document at the third IDD when the respective DTD for the generated XML document satisfies a second predetermined criteria. A system composed of IDDs interconnected by an in home digital network (IHDN) or other mechanism, which system can be operated by the method mentioned above, is also described.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of

Atty. Docket

YASSER ALSAFADI ET AL

PHA 23,863

Serial No.

Group Art Unit:

Filed: CONCURRENTLY

Examiner:

METHODS FOR INITIATING ACTIVITY IN INTELLIGENT DEVICES CONNECTED TO
AN IN HOME DIGITAL NETWORK USING EXTENSIBLE MARKUP LANGUAGE...

Honorable Commissioner of Patents and Trademarks
Washington, D.C. 20231

APPOINTMENT OF ASSOCIATES

Sir:


The undersigned Attorney of Record hereby revokes all
prior appointments (if any) of Associate Attorney(s) or Agent(s) in
the above-captioned case and appoints:

DANIEL J. PIOTROWSKI

(Registration No. 42,079)

c/o U.S. PHILIPS CORPORATION, Intellectual Property Department, 580
White Plains Road, Tarrytown, New York 10591, his Associate
Attorney(s)/Agent(s) with all the usual powers to prosecute the
above-identified application and any division or continuation
thereof, to make alterations and amendments therein, and to
transact all business in the Patent and Trademark Office connected
therewith.

ALL CORRESPONDENCE CONCERNING THIS APPLICATION AND THE
LETTERS PATENT WHEN GRANTED SHOULD BE ADDRESSED TO THE UNDERSIGNED
ATTORNEY OF RECORD.

Respectfully


Jack E. Haken, Reg. 26,902
Attorney of Record

Dated at Tarrytown, New York
this 1ST day of DECEMBER, 1999
c:\appasoc.pw

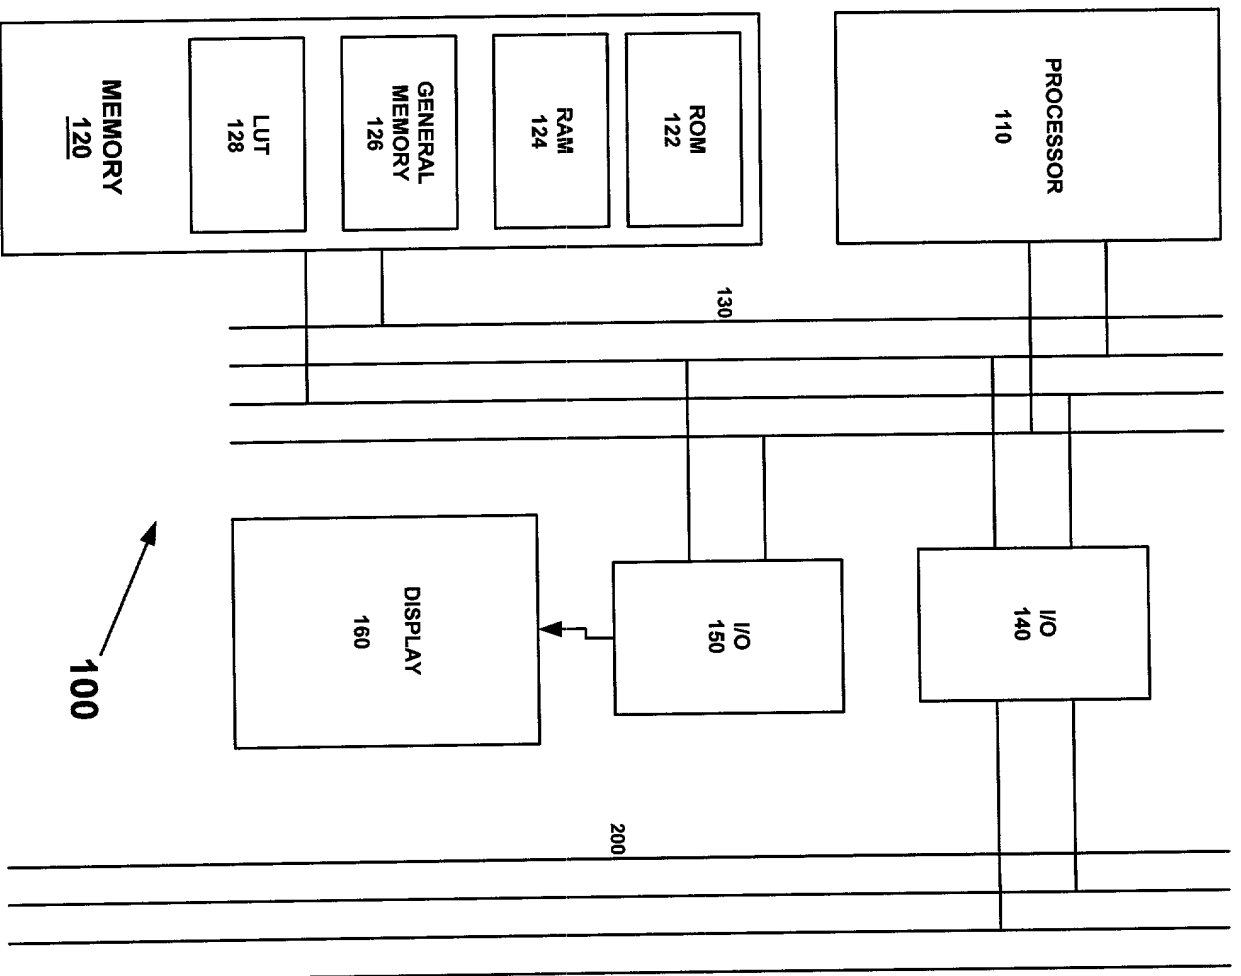


FIG. 1

FIG. 1 is a block diagram of a system 100. The system 100 includes a processor 110, a memory 120, an I/O 140, an I/O 150, and a display 160. The memory 120 includes a ROM 122, a RAM 124, a general memory 126, and a LUT 128. The system 100 is connected to a bus 130 and a bus 200.

LUT 128		
TRUSTED DTD #1 TRUSTED DTD #2 TRUSTED DTD #3	XML_APP #1 XML_APP #2 XML_APP #3	XML_APP #1 STORAGE LOCATION XML_APP #2 STORAGE LOCATION XML_APP #3 STORAGE LOCATION

FIG. 2A

LUT 128			
TRUSTED DTD #1 TRUSTED DTD #2 TRUSTED DTD #3	DTD #1 STORAGE LOCATION DTD #2 STORAGE LOCATION DTD #3 STORAGE LOCATION	XML_APP #1 XML_APP #2 XML_APP #3	XML_APP #1 STORAGE LOCATION XML_APP #2 STORAGE LOCATION XML_APP #3 STORAGE LOCATION

FIG. 2B

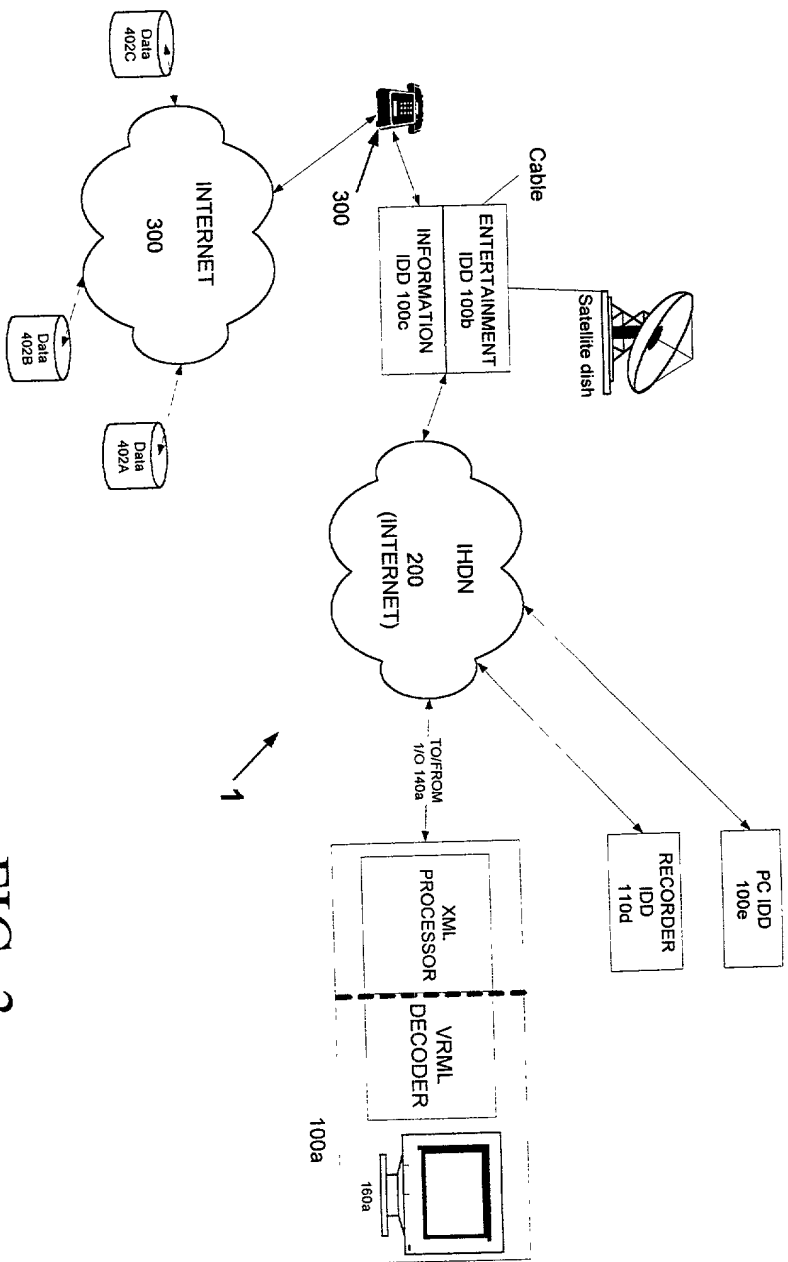


FIG. 3

```
<?xml version="1.0"?>  
<!DOCTYPE guide SYSTEM "VRML.DTD">  
  
<EPG>  
  <Date>06-04-1998</Date>  
  <TimeBlock Block="6pm-midnight">  
    <channel>  
      <definition><number>2</number><name>CBS</name>  
        <channel-type>Network<channel-type></definition>  
    <Entry>  
      <Time-slot>  
        <start-time>18:00</start-time>  
        <end-time>20:00</end-time>  
      <Program>  
        <movie>  
          <title>Miller's Crossing</title>  
          <description>A noir gangster movie that examines a  
            between the Irish and Italian mafia in a small city  
            America. This interesting, but very violent tale fo  
            top member of the Irish gang as he switches sides an  
            explores a web of deceit and double-crosses between  
            of the two gangs, the corrupt local government and  
            shady characters.</description>  
          <program-type>Drama</program-type>  
          <program-subtype>Gangster</program-subtype>  
          <running-time>2:00</running-time>  
          <review-rating>***</review-rating>  
          <language>English</language>  
          <release-year>1991</release-year>  
          <players>  
            <director>Joel Coen</director>  
            <producer>Ethan Coen</producer>  
            <actor>John Turturro</actor></players>  
          </movie>  
          <parental-rating>TVMA</parental-rating>  
        </Program>  
      </Entry>  
    </channel>  
  </TimeBlock>  
</EPG>
```

FIG. 4

[illegible]

```

<!-- DTD for a Simple TV Guide Application      R. Krasinski      1998.06.04 -->
<ELEMENT TVGuide - - (Date, TimeBlock+)>
<ELEMENT Date - - (#PCDATA)>
<ELEMENT TimeBlock - - (channel)+>
<!ATTLIST Block CDATA #REQUIRED >
<ELEMENT channel - - (definition, Entry+)>
<ELEMENT definition - - (number, name, channel-type)>
<ELEMENT Entry - - (Time-slot, program)+>
<ELEMENT Time-slot - - (start-time, end-time)>
<ELEMENT program - - (movie | series-episode | sport | talk | news | cartoon, parental-rating)>
<ELEMENT movie - - (title, description, program-type, program-subtype, running-time, review-rating,
language, release-year, MPAA-rating, players)>
<ELEMENT players - - (director, producer, actor*)>
<ELEMENT actor - - (guild-name, award)>
<ELEMENT producer - - (person-name, award)>
<ELEMENT director - - (guild-name, award)>
<ELEMENT parental-rating - - (#PCDATA)>
<ELEMENT number - - (#PCDATA)>
<ELEMENT name - - (#PCDATA)>
<ELEMENT channel-type - - (#PCDATA)>
<ELEMENT start-time - - (#PCDATA)>
<ELEMENT end-time - - (#PCDATA)>
<ELEMENT title - - (#PCDATA)>
<ELEMENT description - - (#PCDATA)>
<ELEMENT program-type - - (#PCDATA)>
<ELEMENT program-subtype - - (#PCDATA)>
<ELEMENT running-time - - (#PCDATA)>
<ELEMENT review-rating - - (#PCDATA)>
<ELEMENT language - - (#PCDATA)>
<ELEMENT release-year - - (#PCDATA)>
<ELEMENT MPAA-rating - - (#PCDATA)>
<ELEMENT guild-name - - (#PCDATA)>
<ELEMENT person-name - - (#PCDATA)>
<ELEMENT award - - (#PCDATA)>

```

FIG. 5

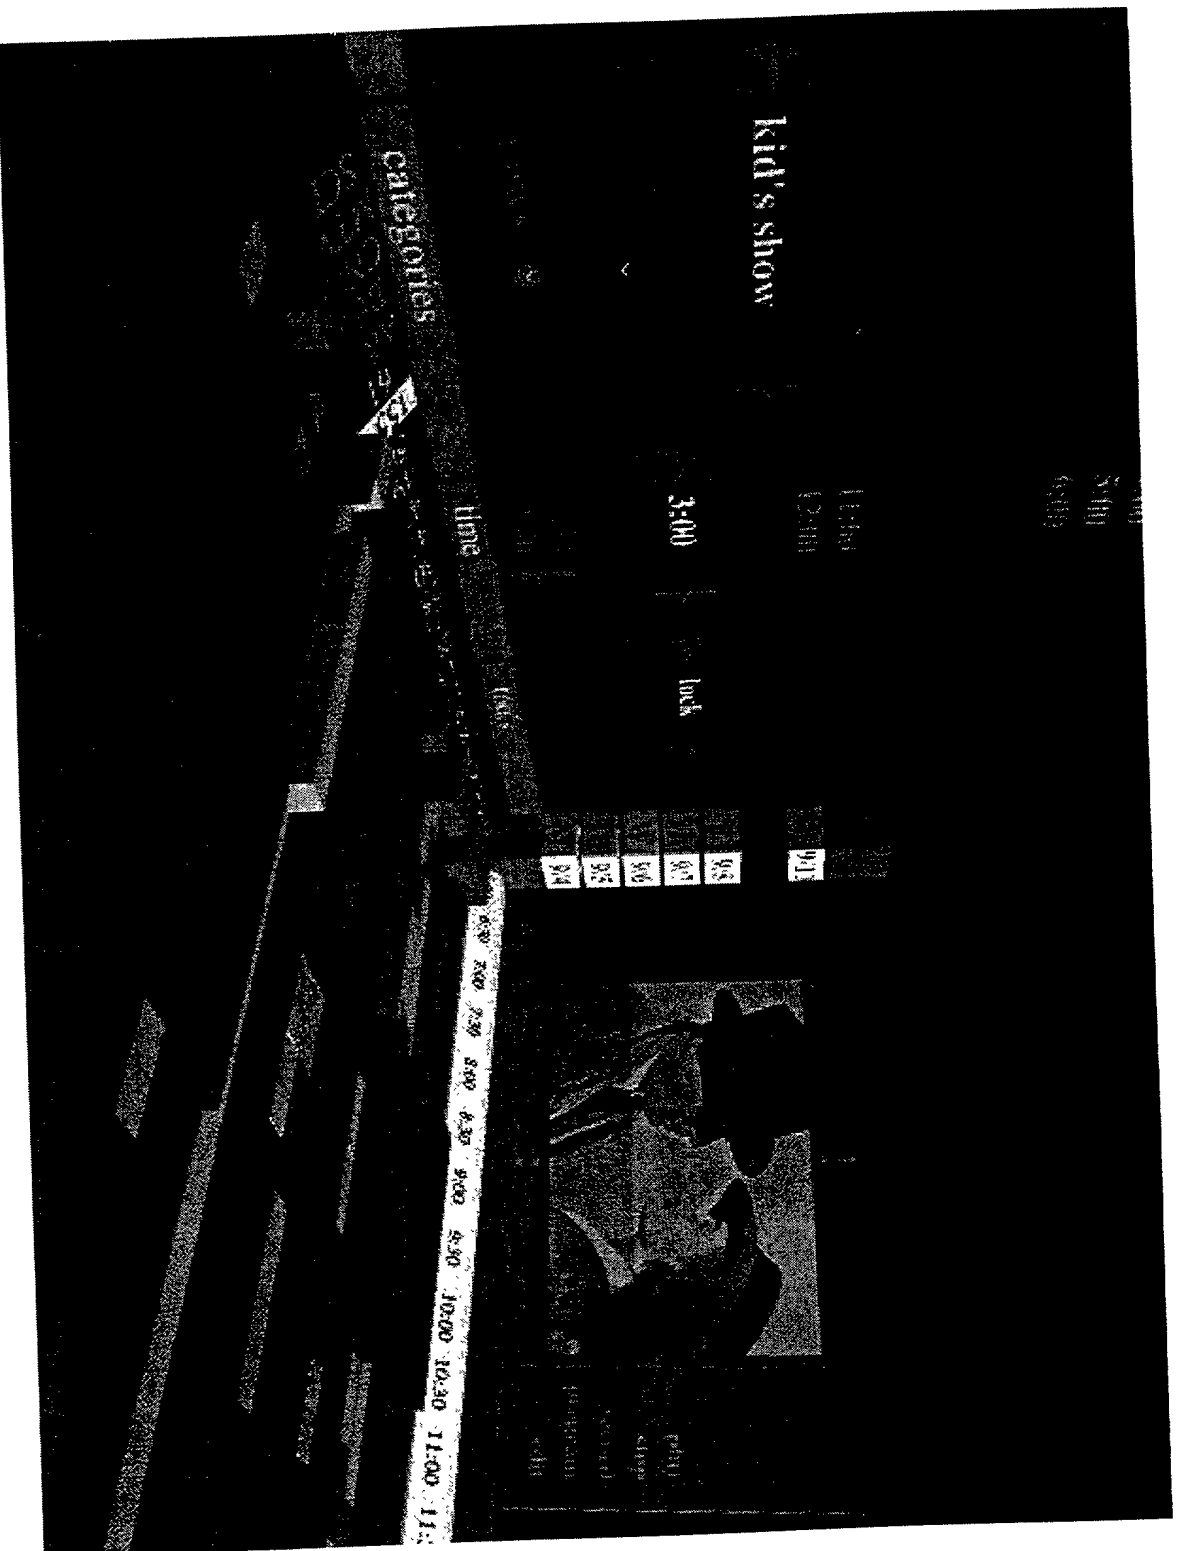


FIG. 6

FIG. 6 is a view of the device of FIG. 1, showing the device in a closed position, with the cover 100 closed over the display 102.

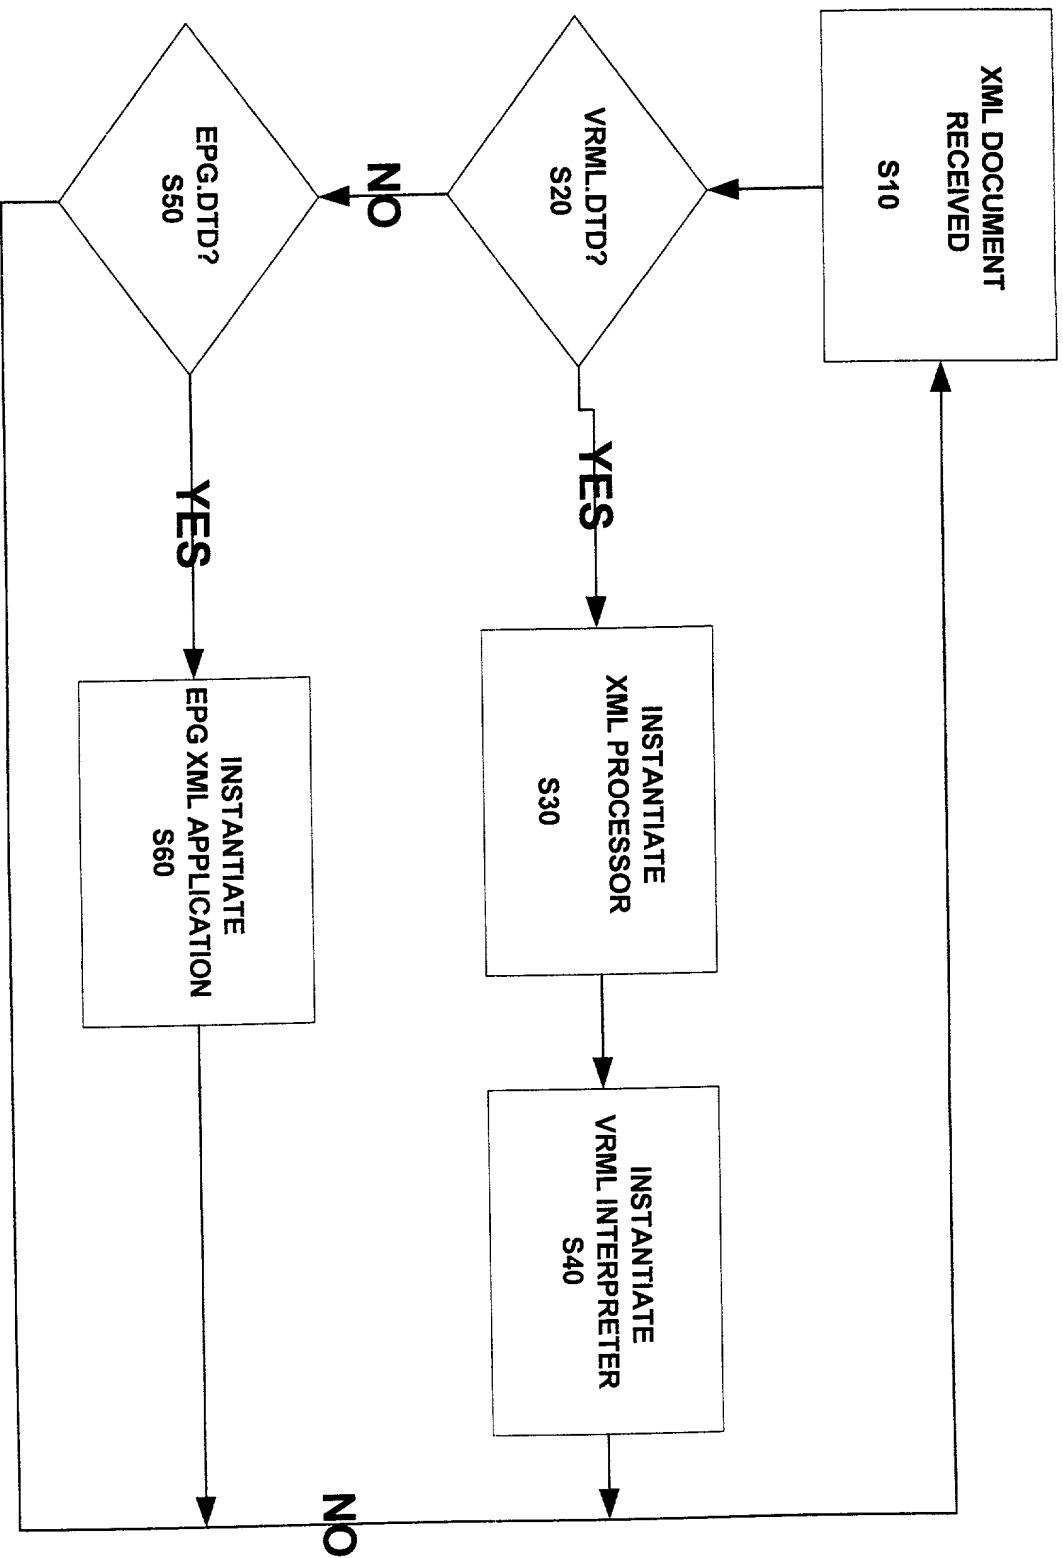



FIG. 7

```

<!-- DTD for a Simple TV Guide Application      R. Krasinski      1998.06.04 -->
<!ELEMENT TVGuide - - (Date, TimeBlock+)>
<!ELEMENT Date - - (#PCDATA)>
<!ELEMENT TimeBlock - - (channel)+>
<!ATTLIST Block CDATA      #REQUIRED >
<!ELEMENT channel - - (definition, Entry+)>
<!ELEMENT definition - - (number, name, channel-type)>
<!ELEMENT Entry - - (Time-slot, program)+>
<!ELEMENT Time-slot - - (start-time, end-time)>
<!ELEMENT program - - ((movie | series-episode | sport | talk | news | cartoon), parental-rating))>
<!ELEMENT movie - - (title, description, program-type, program-subtype, running-time, review-rating,
language, release-year, MPAA-rating, players)>
<!ELEMENT players - - (director, producer, actor*)>
<!ELEMENT actor - - (guild-name, award)>
<!ELEMENT producer - - (person-name, award)>
<!ELEMENT director - - (guild-name, award)>
<!ELEMENT parental-rating - - (#PCDATA)>
<!ELEMENT number - - (#PCDATA)>
<!ELEMENT name - - (#PCDATA)>
<!ELEMENT channel-type - - (#PCDATA)>
<!ELEMENT start-time - - (#PCDATA)>
<!ELEMENT end-time - - (#PCDATA)>
<!ELEMENT title - - (#PCDATA)>
<!ELEMENT description - - (#PCDATA)>
<!ELEMENT program-type - - (#PCDATA)>
<!ELEMENT program-subtype - - (#PCDATA)>
<!ELEMENT running-time - - (#PCDATA)>
<!ELEMENT review-rating - - (#PCDATA)>
<!ELEMENT language - - (#PCDATA)>
<!ELEMENT release-year - - (#PCDATA)>
<!ELEMENT MPAA-rating - - (#PCDATA)>
<!ELEMENT guild-name - - (#PCDATA)>
<!ELEMENT person-name - - (#PCDATA)>
<!ELEMENT award - - (#PCDATA)>

```

FIG. 8

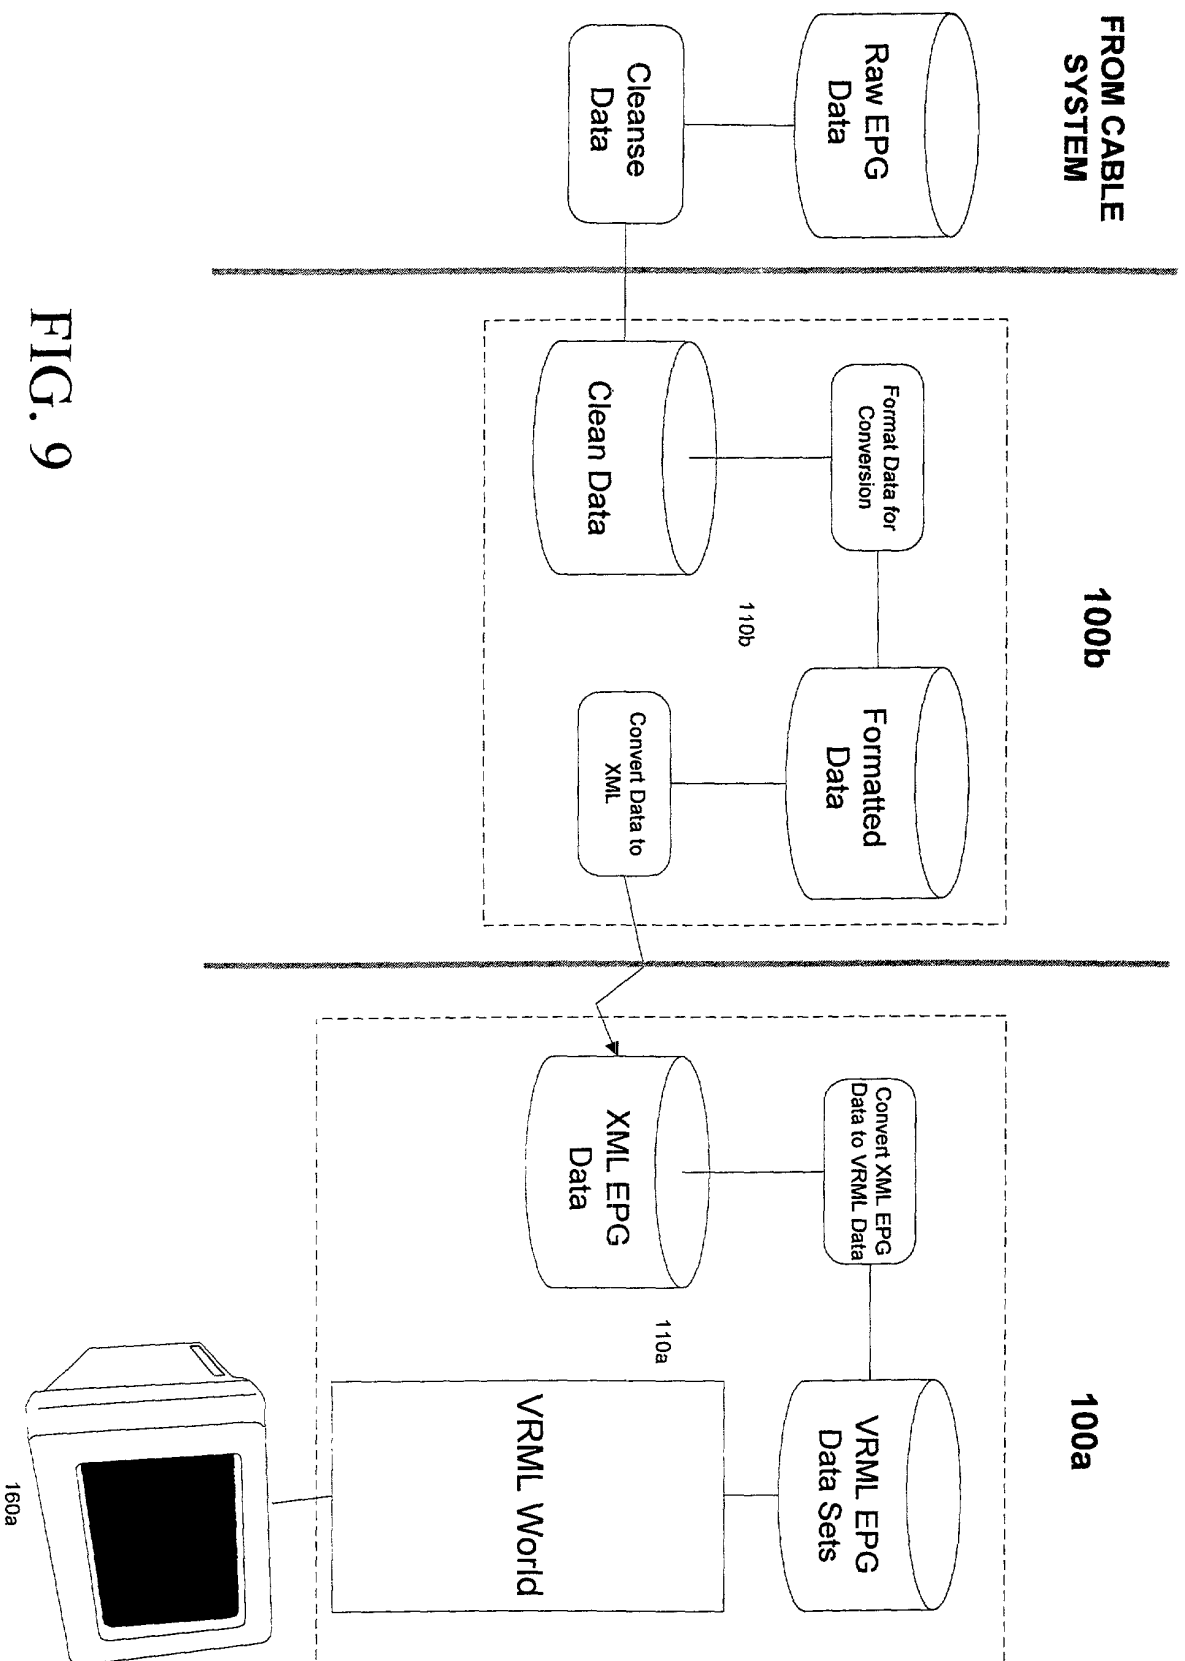

DECLARATION and POWER OF ATTORNEY

Attorney's Docket No.

PHA 23,863

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled METHODS FOR INITIATING ACTIVITY IN INTELLIGENT DEVICES CONNECTED TO AN IN HOME DIGITAL NETWORK USING EXTENSIBLE MARKUP LANGUAGE (XML) FOR INFORMATION EXCHANGE AND SYSTEMS THEREFOR the specification of which (check one)

☐ is attached hereto.

☐ was filed on _____ as Application Serial No. _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by the amendment(s) referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulation, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)

COUNTRY	APPLICATION NUMBER	DATE OF FILING (DAY, MONTH, YEAR)	PRIORITY CLAIMED UNDER 35 U.S.C. 119

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application (s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35 United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

PRIOR UNITED STATES APPLICATION(S)

APPLICATION SERIAL NUMBER	FILING DATE	STATUS (PATENTED, PENDING, ABANDONED)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Algy Tamoshunas, Reg. No. 27,677


Jack E. Haken, Reg. No. 26,902


SEND CORRESPONDENCE TO:


Corporate Patent Counsel;
U.S. Philips Corporation; 580 White Plains Road; Tarrytown, NY 10591

DIRECT TELEPHONE CALLS TO:

Laurie Gathman, Esq.
(914) 333-9605

Dated: 11/11/99		INVENTOR'S SIGNATURE: 		
Full Name of Inventor	Last Name ALSAFADI	FIRST NAME YASSER	Middle Name	
Residence & Citizenship	City YORKTOWN HEIGHTS	STATE OR FOREIGN COUNTRY NY	Country of Citizenship US	
Post Office Address	Street 2227 MOHANSIC AVENUE	CITY YORKTOWN HEIGHTS	State or Country NY	Zip Code 10598

Dated: 11/9/99		INVENTOR'S SIGNATURE: 		
Full Name of Inventor	Last Name DASGUPTA	FIRST NAME ANINDA	Middle Name	
Residence & Citizenship	City CROTON-ON-HUDSON	STATE OR FOREIGN COUNTRY NY	Country of Citizenship India	
Post Office Address	Street 16F SCENIC DRIVE	CITY CROTON-ON-HUDSON	State or Country NY	Zip Code 10520

Dated: 11/12/99		INVENTOR'S SIGNATURE: 		
Full Name of Inventor	Last Name KRASINSKI	FIRST NAME RAYMOND	Middle Name	
Residence & Citizenship	City SUFFERN	STATE OR FOREIGN COUNTRY NY	Country of Citizenship US	
Post Office Address	Street 5 REIGATE PLACE	CITY SUFFERN	State or Country NY	Zip Code 10901

Dated:		INVENTOR'S SIGNATURE:		
Full Name of Inventor	Last Name	FIRST NAME	Middle Name	
Residence & Citizenship	City	STATE OR FOREIGN COUNTRY	Country of Citizenship	
Post Office Address	Street	CITY	State or Country	Zip Code